

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)


PCT

(10) International Publication Number
WO 2005/059480 A1

- (51) International Patent Classification⁷: **G01F 11/28** (74) Agent: **GESTHUYSEN, VON ROHR & EGGERT**,
Huyssenallee 100, 45128 Essen (DE).
- (21) International Application Number: **PCT/EP2004/013761** (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (22) International Filing Date: 3 December 2004 (03.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0328564.0 10 December 2003 (10.12.2003) GB
- (71) Applicant (*for all designated States except US*):
BOEHRINGER INGELHEIM MICROPARTS GMBH
[DE/DE]; Hauert 7, 44227 Dortmund (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **DUNNE, Stephen,**
Terence [GB/GB]; The Cottage, Gt. Finborough, Stow-
market, Suffolk IP14 3AE (GB).
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: DISCHARGE DEVICE WITH A METERED DOSE VALVE

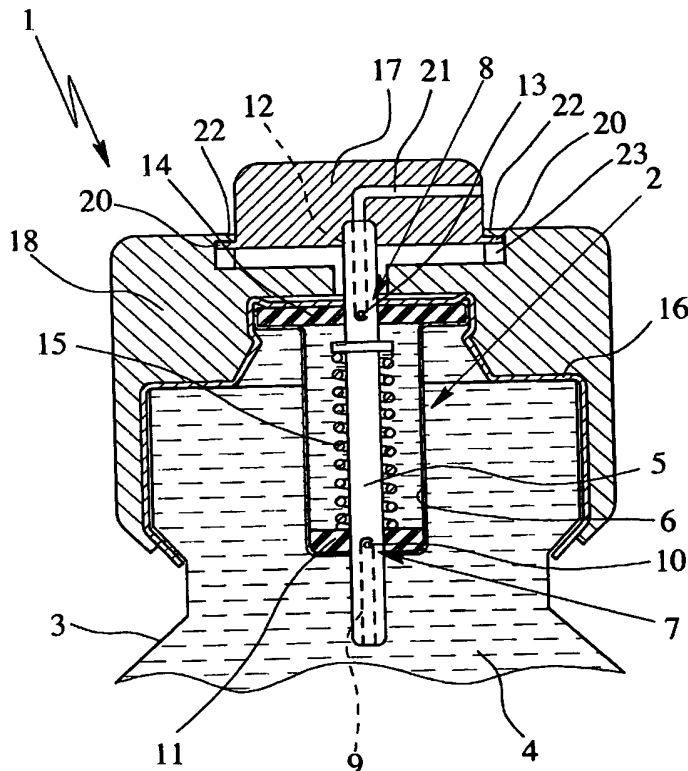

(57) Abstract: A discharge device with a metered dose valve is proposed. The metered dose valve comprises an inlet valve, a metering chamber and an outlet valve. In order to allow discharge of fluid from the metering chamber in multiple steps, a user can depress and release an actuation member multiple times in a selected discharge state wherein refill of the metering chamber with new liquid is prevented.

WO 2005/059480 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*